

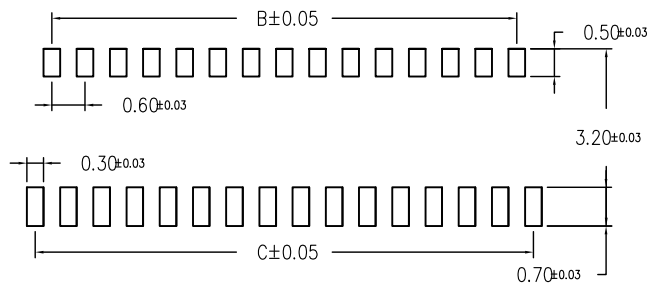
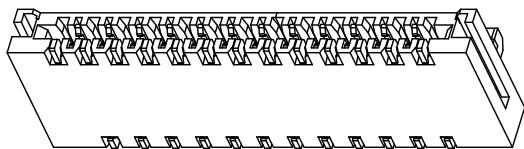
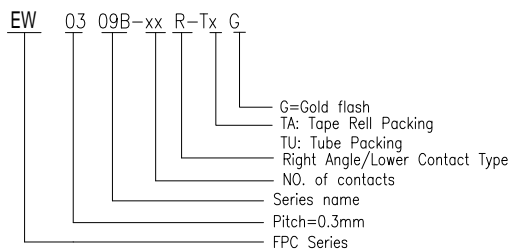
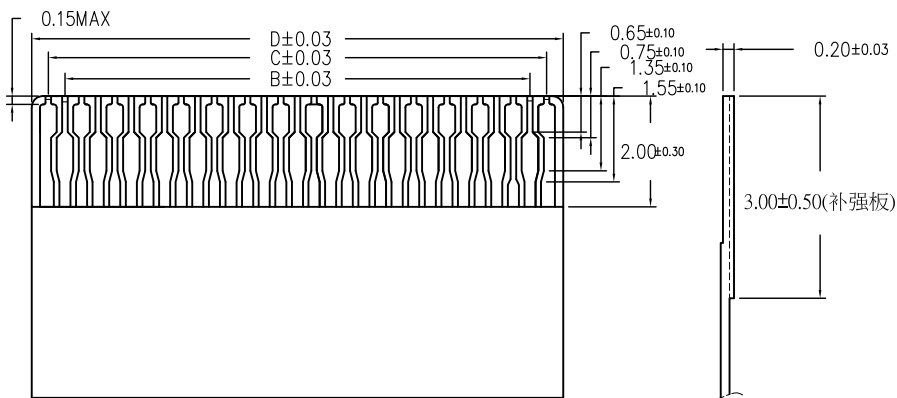
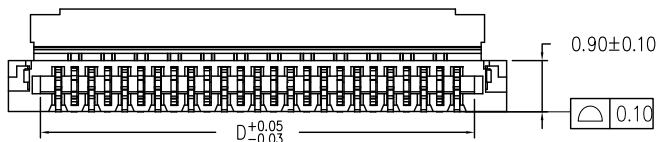


深圳亿沃鑫科有限公司  
 TEL:+86135-901-78542  
 FAX:+86-755-32932856  
 www.ewconn.com

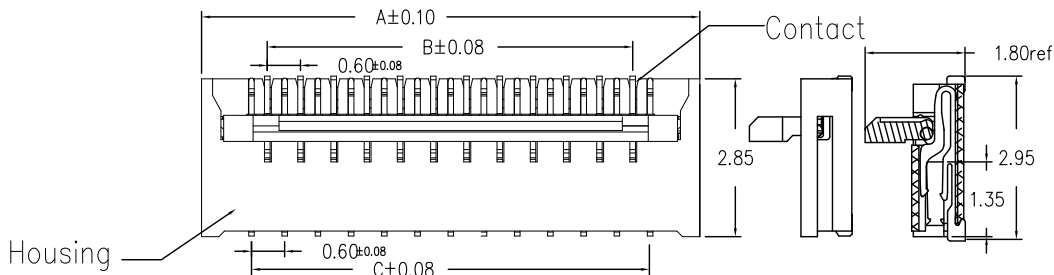

FPC/FFC Insert Direction  
 Recommended P.C.B Layout

- Note:
- Material
    - Housing: LCP UL94-V0 Color:Natural.Or Black
    - Actuator: LCP UL94-V0 Color:Black Or Natural
    - Contact: Phosphor Bronze.
  - Plating
    - Contact: See Part Number.
  - Rating:
    - Operating Voltage: 30V AC/DC.
    - Current Rating: 0.2A AC/DC.
    - Operating Temperature: -55°C~+85°C.
  - Part Number:



No. of Contacts	Dimension			
	A	B	C	D
7	3.60	1.20	1.80	2.43
9	4.20	1.80	2.40	3.03
11	4.80	2.40	3.00	3.63
13	5.40	3.00	3.60	4.23
15	6.00	3.60	4.20	4.83
17	6.60	4.20	4.80	5.43
23	8.40	6.00	6.60	7.23
25	9.00	6.60	7.20	7.83
27	9.60	7.20	7.80	8.43
31	10.80	8.40	9.00	9.63
39	13.20	10.80	11.40	12.03
45	15.00	12.60	13.20	13.83
51	16.80	13.40	15.00	15.63

Applicable FPC

本产品符合 RoHS SONY00259 HF 其他  
 ※禁止使用本公司所禁用有毒物质

A	NEW DRAWING	FCN.NO	BY	04/15'15
REV	DESCRIPTION	FCN.NO	BY	DATE

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参考表		<b>EWCONNECTOR</b> 深圳亿沃鑫科技有限公司	
X.X ±0.30	X.X° ±5°	TITLE: FPC 0.3Pitch 1.0H ZIF 產品名稱: 后掀蓋式	
X.XX ±0.20	X.XX° ±2°	APPD: 核准:	DWG NO: 產品料號: <b>EW0309B-xxR-TAGX</b>
X.XXX ±0.02	X.XXX° ±1°	CHECK: 校對:	DATE: 20111102
		DRAW: 繪圖: Yang	SCALE: 1:1
			UNIT: mm
			PAGE: 1/1