
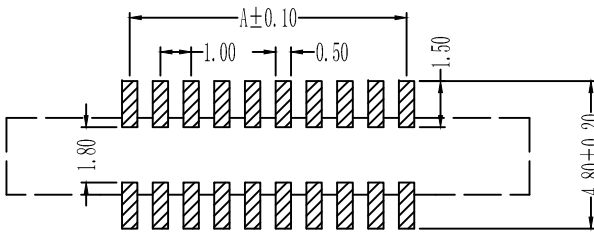
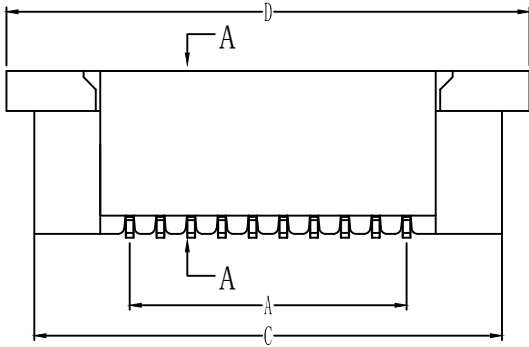


1.0mm PITCH FPC CONNECTORS




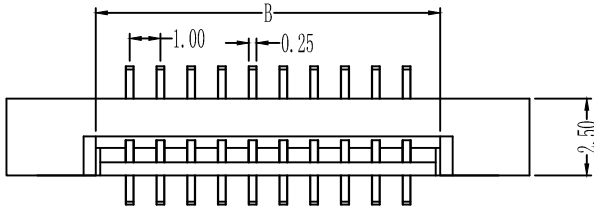


PCB Layout

性能:

额定电流: 0.5A
 额定电压: 50V
 耐压: 500V
 接触电阻: $\leq 20m\Omega$
 绝缘电阻: $800M\Omega$
 工作温度: $-20^{\circ}C \sim +85^{\circ}C$

塑件 (材质): LCP, UL94V-0
 锁扣 (材质): PA46, UL94V-0
 插簧 (材质): 磷青铜, 镀锡/镀金

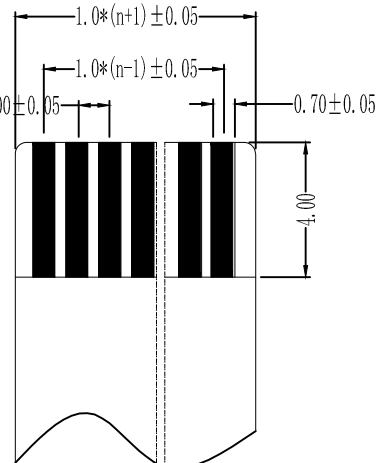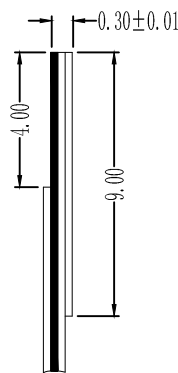

适用扁平电缆

孔位	A	B	C	D
2	1	3.2	7.2	9
3	2	4.2	8.2	10
4	3	5.2	9.2	11
5	4	6.2	10.2	12
6	5	7.2	11.2	13
7	6	8.2	12.2	14
8	7	9.2	13.2	15
9	8	10.2	14.2	16
10	9	11.2	15.2	17
11	10	12.2	16.2	18
12	11	13.2	17.2	19
13	12	14.2	18.2	20
14	13	15.2	19.2	21
15	14	16.2	20.2	22
16	15	17.2	21.2	23
17	16	18.2	22.2	24
18	17	19.2	23.2	25
19	18	20.2	24.2	26
20	19	21.2	25.2	27
21	20	22.2	26.2	28
22	21	23.2	27.2	29
23	22	24.2	28.2	30
24	23	25.2	29.2	31
25	24	26.2	30.2	32
26	25	27.2	31.2	33
27	26	28.2	32.2	34
28	27	29.2	33.2	35
29	28	30.2	34.2	36
30	29	31.2	35.2	37

深圳亿沃鑫科有限公司
 TEL:+86135-901-78542
 FAX:+86-755-32932856
 www.ewconn.com

X. ± 0.3	X° ± 5°	UNITS	mm	NAME (INTENDED USE)	EWCONNECTOR 深圳亿沃鑫科有限公司
.X ± 0.25	.X° ± 2°	MAT'L		1.0mm FPC (G型) 立贴式 (无焊片)	
.XX ± 0.20	.XX° ± 1°	FINISH		PART NO. (INTENDED USE)	TITLE:
.XXX ± 0.10	.XXX° ± 0.5°			EW1038V	1.0mm FPC (G型) 立贴式 (无焊片)
Q' TY				APPD:	DWG NO.:
				CHKD:	100K17-GUB0000000
DR: YLZ 2011.09.28				SCALE SHEET REV.	
				1/1 1/1 A	