


一沃连接器
Tel: +86-135-90178542
Fax: +86-755-33581171
www.ewconn.com

ROHS


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2017.4.18

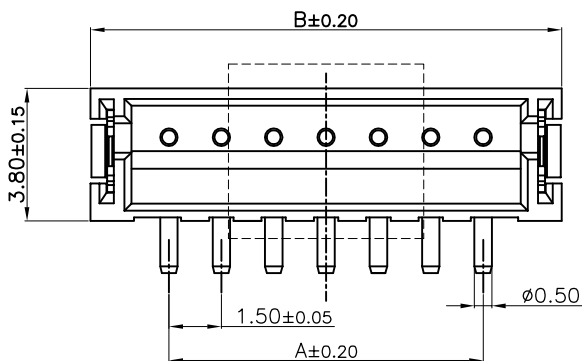



料号说明:

KL-ZH-NALT -02

无: 镀亮锡
-02: 镀雾锡
WT: 卧贴
LT: 立贴
产品PIN数
产品型号
公司代号

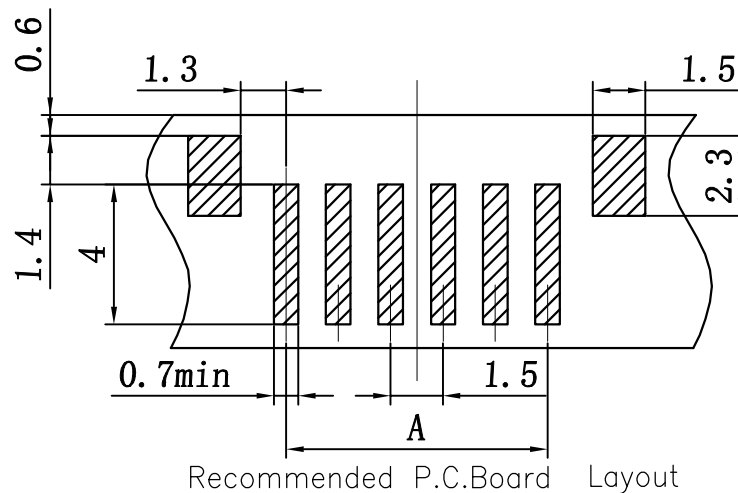

Recommended P.C.Board Layout

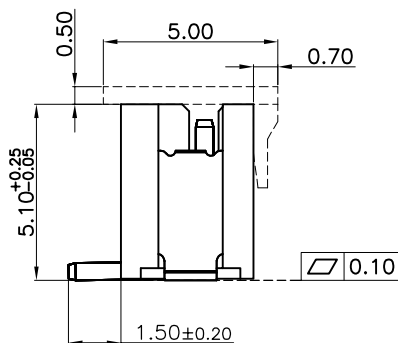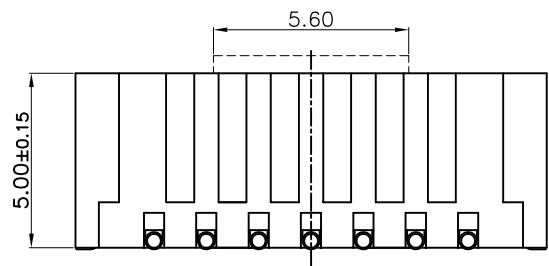

P/N.	尺寸 (mm)	
	A	B
KL-ZH-2ALT	1.5	6.0
KL-ZH-3ALT	3.0	7.5
KL-ZH-4ALT	4.5	9.0
KL-ZH-5ALT	6.0	10.5
...
KL-ZH-16ALT	22.5	27.0

Specifications / 技术规格:

Current rating: 1A
额定电流: 1A
Voltage rating: 250V AC, DC
额定电压: 250V AC, DC
Insulation Resistance: 1000MΩ Min.
绝缘电阻: 最小1000MΩ
Dielectric Withstanding: 500V AC 1Min
耐电压: 500V AC 1分钟
Contact Resistance: 20mΩ Max.
接触电阻: 最大20mΩ
Operating Temperature: -25°C to +85°C
工作温度: -25°C 到85°C

Materials / 材料:

Contact Material: Brass(Sn plating)
接触铜针材料: 黄铜(镀锡)
Soldering Terminal: Bronze(Sn plating)
焊片材料: 磷铜(镀锡)
Insulation Material: LCP UL94V-0 Nature
绝缘体材料: LCP UL94 V-0 本色

EWCONNECTOR

深圳亿沃鑫科技有限公司

GENERAL TOLERANCE

X.* ± 3'	.XXX ±0.10
.X* ± 2'	.XX ±0.15
.XX* ± 1'	.X ±0.25
.XXX* ± 0.5'	X. ±0.35

DESIGN: HELLER

DATE: 2017.4.18

DWG. NO.

CHECKED: 瞿益远

DATE: 2017.4.18

AUDITED: 张宁

DATE: 2017.4.18

APPROVED: 朱建华

DATE: 2017.4.18

PART NO.

ZH-NALT

TITLE.

EW1502-WV-XXP WAFER

REV.	A	UNIT.	MM	SCALE.	1:1
------	---	-------	----	--------	-----