
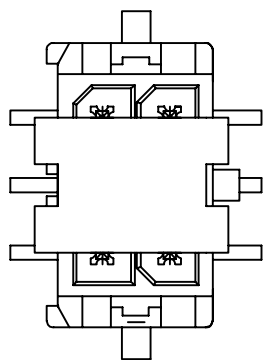

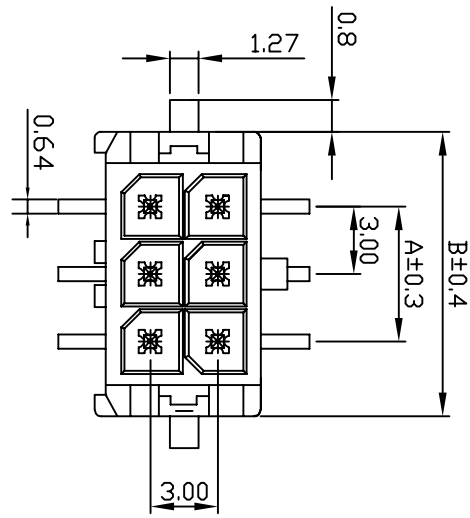



1 2 3 4 5 6 7 8 9

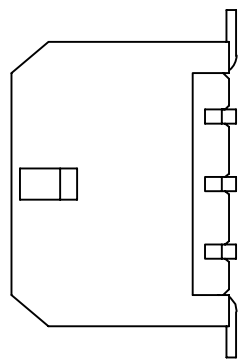


EWCONNECTOR
 TEL:+86-755-33514075
 FAX:+86-755-22142154
<http://www.ewconn.com>

REV	MODIFICATION	DATE	DRAW	APPROVE

SPECIFICATIONS
 Current rating: 5A AC, DC
 Voltage rating: 250V AC,DC
 Temperature range: -20°C ~ +85°C
 Insulation resistance: 1000MΩ/min.
 Withstanding voltage: 1500V AC/minute.
 Contact resistance: 30m Ω/ max.
 MATERIAL:LCP UL 94V-0
 Pin:Brass/Tin-Plated
 SUITABLE KR3000HF SERIES Housing
 MOQ:1,000PCS

PART NO.	Dimension mm	
	A	B
C3000VS20130LP2B	----	6.65
C3000VS20230LP2B	3.0	9.65
C3000VS20330LP2B	6.0	12.65
C3000VS20430LP2B	9.0	15.65
C3000VS20530LP2B	12.0	18.65
C3000VS20630LP2B	15.0	21.65
C3000VS20730LP2B	18.0	24.65
C3000VS20830LP2B	21.0	27.65
C3000VS20930LP2B	24.0	30.65
C3000VS21030LP2B	27.0	33.65
C3000VS21130LP2B	30.0	36.65
C3000VS21230LP2B	33.0	39.65

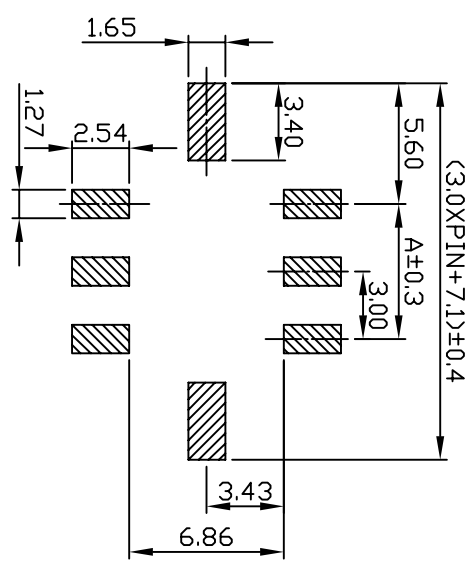

PCB LAYOUT:COMPONENT SIDE

EWCONNECTOR

E-World Electronic Industry Ltd

.0	±0.25	MX3.0 SMT Vertical Dual Row Wafer
.00	±0.15	P/N:EWVWB3002-WV-2*XP
.000	±0.08	

Drawn by: Even
 Revised by:
 Approved by:

Date: 2010-08-20
 Date:

3RD ANGLE'S	UNIT	m/m	SCALE	NONE	REV.	A	DRAWING NO:	30005340023

A

B

C

D

E

F

A

B

C

D

E

F